Exit Sign

LED wall-mounted exit signs

The utilitarian-designed Thorlux Exit Sign is a general-purpose, maintained or non-maintained emergency escape signage with a choice of ISO 7010 or EURO legends.

Exit Sign can be supplied with comprehensive SmartScan, DALI/Self-Test, or Standard Emergency options to suit any requirement, and is available in three-hour emergency versions.

Applications: offices, retail, and schools.

- Extremely long LED lifetime, up to 100,000 hours
- 34 m maximum viewing distance in accordance with BS EN 1838
- Three hour, maintained or non-maintained emergency operation
- Choice of legends
- Simple to install, full status reporting SmartScan wireless communication versions

Notes: Two batteries required per luminaire



IP40

SMARTSCAN

Specification

Mounting	**Surface**	IP rating	**IP40**

Emergency data

Legend type	**EURO arrow down** **EURO arrow left** **EURO arrow right** **ISO 7010 arrow down** **ISO 7010 arrow left** **ISO 7010 arrow right** **ISO 7010 arrow up**	Maximum viewing distance	**34 m**
Emergency type	**Maintained** **Non-maintained**	Emergency duration	**3 hours**
Battery specification	**Nickel Metal Hydride (NiMH)**		

Power

LED power	**4 W**	Circuit power	**6 W**

Exit Sign

Construction

Housing	**Zinc coated steel body**	Body colour	**White**
Optical assembly	**Opal legend panel**		


LED characteristics

Colour temperature	**4000 K**

Compliance

UKCA	**Yes**	CE	**Yes**

Dimensions

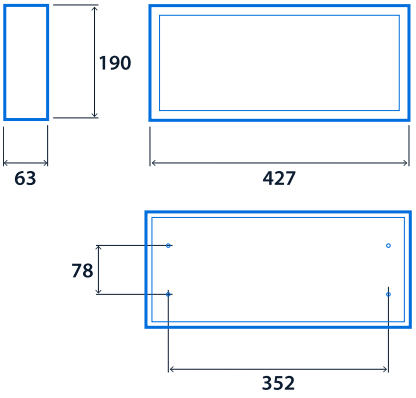

Exit Sign

Range

	Description	Emergency system	CAT. No.	Emergency duration	Emergency type
ISO 7010 legend	Arrow left	**W / D / E**	**EX15593**	3 hour	Maintained
		W / D / E	**EX15594**	3 hour	Non-maintained
	Arrow right	**W / D / E**	**EX15595**	3 hour	Maintained
		W / D / E	**EX15596**	3 hour	Non-maintained
	Arrow down	**W / D / E**	**EX15597**	3 hour	Maintained
		W / D / E	**EX15598**	3 hour	Non-maintained
	Arrow up	**W / D / E**	**EX15599**	3 hour	Maintained
		W / D / E	**EX15600**	3 hour	Non-maintained
EURO legend	Arrow left	**W / D / E**	**EX15601**	3 hour	Maintained
		W / D / E	**EX15602**	3 hour	Non-maintained
	Arrow right	**W / D / E**	**EX15603**	3 hour	Maintained
		W / D / E	**EX15604**	3 hour	Non-maintained
	Arrow down	**W / D / E**	**EX15605**	3 hour	Maintained
		W / D / E	**EX15606**	3 hour	Non-maintained

Emergency system - prefix catalogue number with **W** SmartScan Emergency / **D** DALI / Self-Test Emergency / **E** Standard Emergency

E.g. **WEX15593** = ISO 7010 legend / Arrow left / SmartScan Emergency

Spares

Product code	Description	Weight
EMB602	Nickel Metal Hydride (NiMH) battery - End of life batteries can be returned to Thorlux for recycling	0.15 kg



Click or scan here

View Exit Sign variants using our online filtering tool



Information is correct as of 04 Nov 2026, however must not be interpreted as a guarantee of individual product performance and/or characteristics. We reserve the right to alter specifications and designs without prior notice.