Flexbar Track

Slimline, low-glare linear luminaires



A track-mounted version of the low-glare Flexbar luminaire, the elegant Flexbar Track is suitable for applications where adaptability and low-glare lighting are key.

The high-performance lens technology provides well-controlled, low-glare lighting for optimum user comfort with a range of reflector options. Supreme levels of efficiency (160.5 LL/CW) and a 100,000-hour working life ensure Flexbar offers the performance to match its elegance.

For use with the Track system.

Applications: offices, retail, breakout areas, reception areas, circulation spaces, meeting rooms, and education.

- Track mounted individual luminaires
- TM66 score of 2.6 - LIA/CIBSE certification scheme TSD-012 verified
- White (RAL 9016) or black (RAL 9005) body finishes
- Black ‘invisible’ light source, metallised low glare and white reflector options
- Magnetic clip-in light engine for ease of maintenance
- Low glare optics for EN12464-1 / LG7 (<1500cd/m² @ 65°) when using the metallised or black reflector

IP20 **Up to 154.4 LL/CW** **LUXGUARD** **TM66 circularity score 2.6**

Specification

Mounting	**Track**	IP rating	**IP20**
Nominal size	**840 mm** **1400 mm**		

Sustainability

TM66 circularity score	**2.6**

Lighting

Lumen output	**1,160 lm - 5,325 lm**	Efficacy	**Up to 154.4 LL/CW**

Power

LED power	**8 W - 31 W**	Circuit power	**10 W - 36 W**

Construction

Housing	**Extruded aluminium body with polycarbonate injection moulded end caps**	Finish	**Full polyester powder coat**
Body colour	**Black (RAL 9005)** **White (RAL 9016)**	Optical assembly	**Custom optical system combining a reflector and optical lens for each LED**
Reflector colour	**Black reflector** **Metallised reflector** **White reflector**		


LED characteristics

CRI	**80+**	Colour temperature	**4000 K**
Rated life (hours)	**100 K - L90/B10**	LED protection	**LUX Guard**
Driver efficiency	**>77%**	Replaceable light source	**Yes**
Power factor	**>0.9**	MacAdam ellipse	**3 Step**
Flicker metric	**IEC TR 61547-1: PstLM ≤1.0 / SVM ≤0.4**		

Compliance

UKCA	**Yes**	CE	**Yes**
Energy efficiency class	**This product contains a light source of energy efficiency class B**	Thermoplastic rating	**TP(a)**

Dimensions

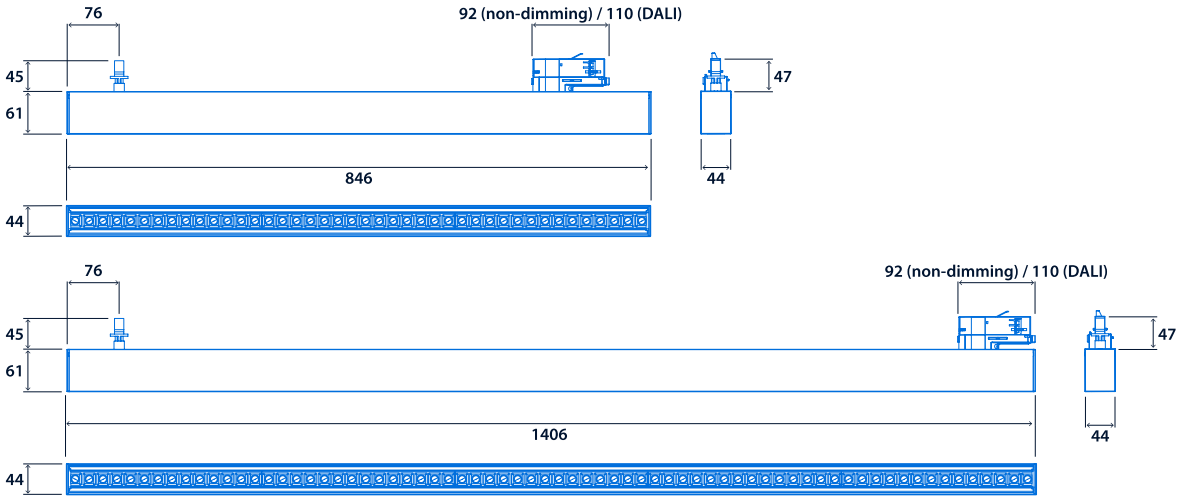


Range

Product	LED power	Nominal size	Reflector	Lighting control system
FRT Flexbar Track	**08** 8 W **12** 12 W **19** 19 W	**S** 840 mm	**W** White **M** Metallised **B** Black	**A** Dimming (DALI) **L** Non-dimming
	14 14 W **20** 20 W **31** 31 W	**M** 1400 mm		

Black version - suffix catalogue number with **B6**

E.g. **FRT08SWAB6** = 8 W / 840 mm / White reflector / Dimming (DALI) / Black version

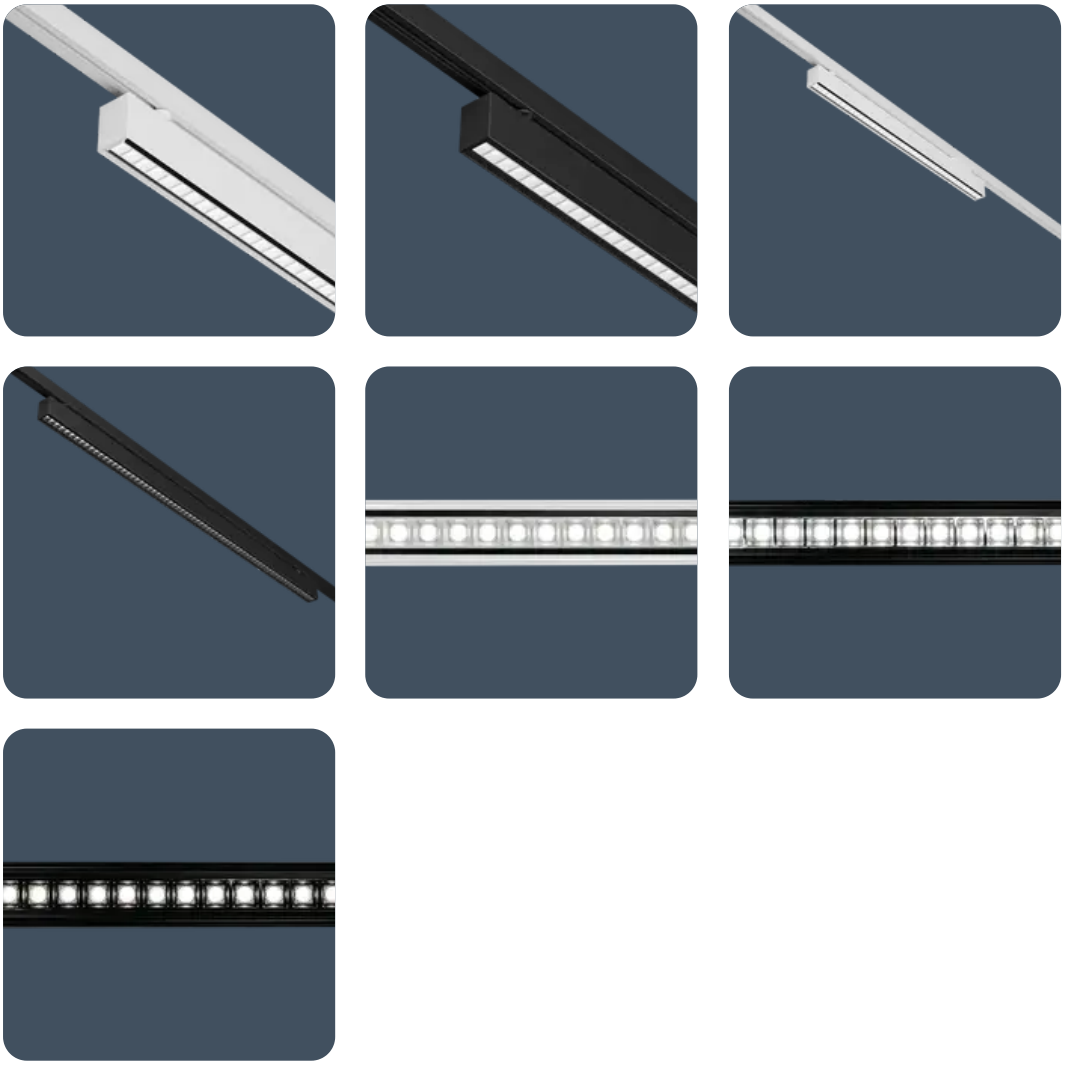

Click or scan here

View Flexbar Track variants using our online filtering tool



Information is correct as of 10-Nov-2026, however must not be interpreted as a guarantee of individual product performance and/or characteristics. We reserve the right to alter specifications and designs without prior notice.