Flexblox Wallwash

Linear LED wallwash luminaire

Flexblox Wallwash is a slimline, linear luminaire providing an asymmetric wallwash distribution for highlighting walls and displays.

Available for both recessed and track mounting installations. The different mounting options allow Flexblox Wallwash to be used for highlighting features and artwork, retail displays and classroom whiteboards with flexible adjustment on track versions for aiming control.

The white and black body finishes, colour temperature, and CRI options as standard, ensure Flexblox Wallwash has a version suitable for your lighting requirements.

For use with the Track system.

Applications: retail, display and feature, whiteboards, circulation, and meeting rooms.

- Recessed or track mounted
- Asymmetric wallwash distribution for wall displays
- TM66 score of 2.5 - LIA/CIBSE certification scheme TSD-012 verified
- White and black body finishes
- Colour temperature and CRI options available as standard to suit the application



IP20 **Up to 99.4 LL/CW** **TM66 circularity score 2.5**

Specification

Mounting	**Recessed** **Track**	IP rating	**IP20**

Sustainability

TM66 circularity score	**2.5**

Lighting

Distribution	**Wallwash**	Lumen output	**635 lm - 1,260 lm**
Efficacy	**Up to 99.4 LL/CW**		

Flexblox Wallwash

Power

LED power	**6 W - 11 W**	Circuit power	**8 W - 13 W**

Construction

Housing	**Steel body and end caps**	Finish	**Full polyester powder coat**
Body colour	**Black (RAL 9005)** **White (RAL 9016)**	Optical assembly	**High performance acrylic lens with polycarbonate metallised reflector**

LED characteristics

CRI	**80+** **90+**	Colour temperature	**3000 K** **4000 K**
Rated life (hours)	**100 K - L80/B10**	Driver efficiency	**>74%**
Replaceable light source	**Yes**	Power factor	**>0.95**
MacAdam ellipse	**3 Step**	Flicker metric	**IEC TR 61547-1: PstLM ≤1.0 / SVM ≤0.4**


Compliance

UKCA	**Yes**	CE	**Yes**
Energy efficiency class	**This product contains a light source of energy efficiency class C** **This product contains a light source of energy efficiency class D**		

Flexblox Wallwash


Dimensions

Flexblox Wallwash Recessed

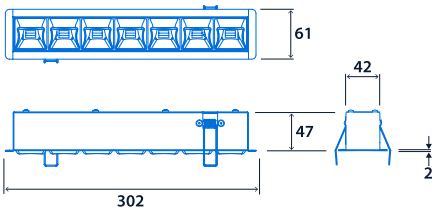


Cut out : 49mm x 288mm
Void depth : ≥120mm


Reinforcing Plate

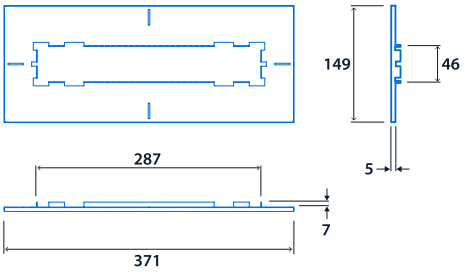

Standard Remote Driver



Flexblox Wallwash Track

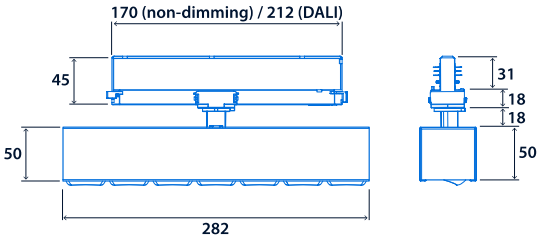


Flexblox Wallwash

Range

Product	LED power	Mounting	CRI	Colour temperature	Body colour	Lighting control system
FW Flexblox Wallwash	**06** 6 W **11** 11 W	**T** Track **R** Recessed	**8** 80 **9** 90	**3** 3000 K **4** 4000 K	**W** White **B** Black	**A** Dimming (DALI) **L** Non-dimming

E.g. **FW06T83WA** = 6 W / Track mounted / CRI 80 / 3000 K / White body / Dimming (DALI)

Flexblox Wallwash



Click or scan here

View Flexblox Wallwash variants using our online filtering tool



Information is correct as of 10 Nov 2026, however must not be interpreted as a guarantee of individual product performance and/or characteristics. We reserve the right to alter specifications and designs without prior notice.