
Flexview

Recessed picture luminaire with dual light engine - backlit panel and edge-lit T-bar mounted continuous perimeter.

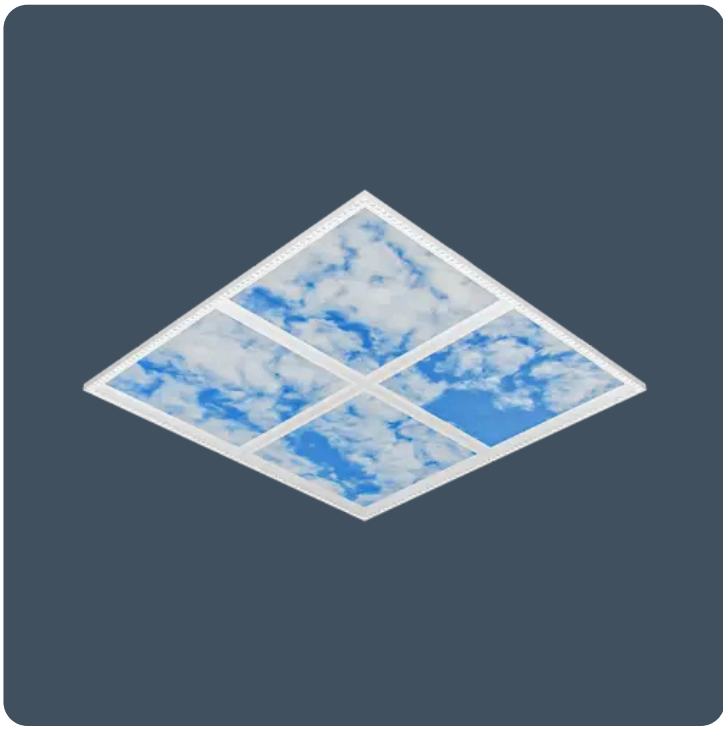

With its striking skylight effect, Flexview is a high-efficiency, recessed lay-in luminaire featuring a dual light engine.

Designed to form the centrepiece of a room's lighting scheme, Flexview combines continuous T-bar mounted Flexline perimeter illumination with a backlit 600 x 600 "picture window" panel to enhance visual interest and comfort. Flexview integrates seamlessly with the linear Flexline system, enabling the effective illumination of interior environments using sophisticated, low-glare optics.

Applications: teaching spaces, offices, corridors, waiting rooms, break-out spaces, reception areas, retail, and windowless rooms.

- Dual light engine design, perimeter light engine for main illumination and secondary light engine for the picture window
- Black 'invisible' light source, metallised low glare and white reflector options
- Multiple kit options available
- Back-lit panel remains at constant brightness (does not dim)

IP20 | **Up to 100.5 LL/CW** | SMARTSCAN | LUXGUARD | **TM66 circularity score 2.7**

Specification

Mounting	**Recessed**	IP rating	**IP20**
Nominal size	**1.2 x 1.2 m** **1.2 x 2.4 m** **1.8 x 1.2 m** **2.4 x 2.4 m**	Max presence detection height	**8 m**

Sustainability

TM66 circularity score	**2.7**

Lighting

Lumen output	**2,460 lm - 10,170 lm**	Efficacy	**Up to 100.5 LL/CW**
Additional light element	**Illuminated picture window**		

Flexview

Power

LED power	**28 W - 106 W**	Circuit power	**35 W - 119 W**

Construction

Housing	**Extruded aluminium frame**	Finish	**Full polyester powder coat**
Body colour	**White (RAL 9016)**	Optical assembly	**High performance optical system with a dedicated lens for each LED**
Reflector colour	**Black reflector** **Metallised reflector** **White reflector**		

LED characteristics


CRI	**80+**	Colour temperature	**4000 K**
Rated life (hours)	**100 K - L90/B10**	LED protection	**LUX Guard**
Driver efficiency	**>74%**	Replaceable light source	**Yes**
Power factor	**>0.85**	MacAdam ellipse	**3 Step**
Flicker metric	**IEC TR 61547-1: PstLM ≤1.0 / SVM ≤0.4**		

Compliance

UKCA	**Yes**	CE	**Yes**
Energy efficiency class	**This product contains a light source of energy efficiency class A**	Thermoplastic rating	**TP(a)**

Dimensions

Per Flexview module

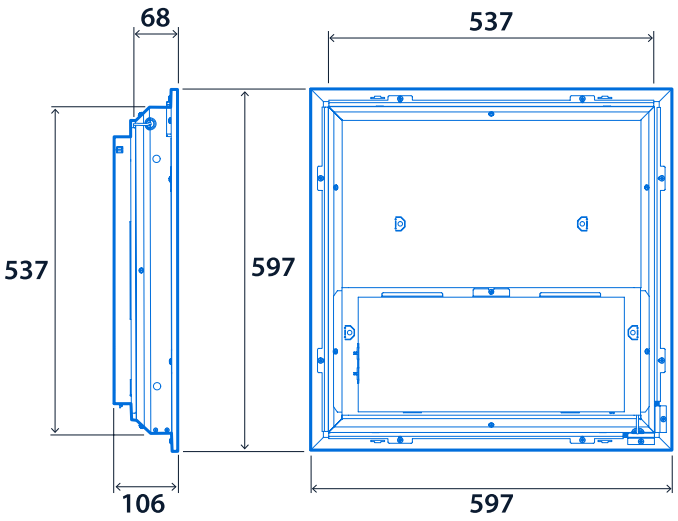

NOTE: Suitable for exposed
T-Bar lay-in ceilings only


Flexview

Range

Product	Wattage	Size	Reflector	Lighting control system
FV Flexview	**28** 28 W **31** 31 W **35** 35 W	**04** 1.2 x 1.2 m - Four	**W** White **M** Metallised **B** Black	**S** SmartScan Internal **A** Dimming (DALI) * **L** Non-dimming
	39 39 W **44** 44 W **48** 48 W	**06** 1.2 x 1.8 m - Six		
	51 51 W **56** 56 W **62** 62 W	**08** 1.2 x 2.4 m - Eight		
	91 91 W **98** 98 W **106** 106 W	**16** 2.4 x 2.4 m - Sixteen		

* Retractive switch dimming **not** available

E.g. **FV2804WS** = Flexview / 28 W / 1.2 x 1.2 m - Four / White reflector / SmartScan Internal

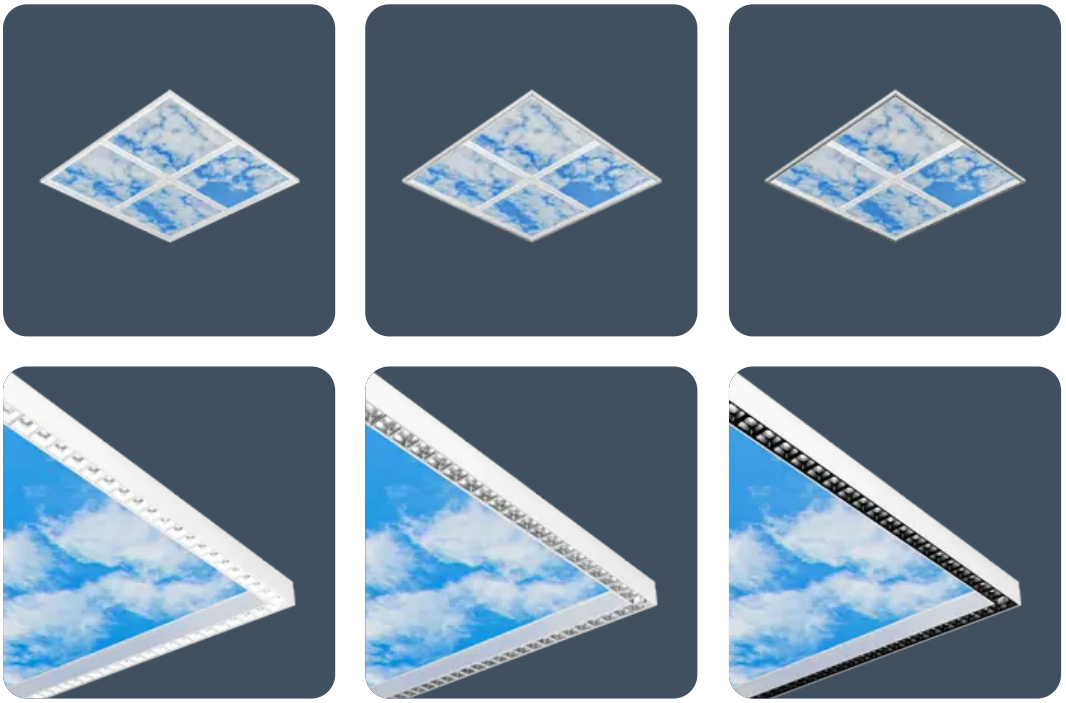

Click or scan here

View Flexview variants using our online filtering tool



Information is correct as of 10-Nov-2026, however must not be interpreted as a guarantee of individual product performance and/or characteristics. We reserve the right to alter specifications and designs without prior notice.