G3 Evo Pendant

Suspended LED downlighters



A contemporary pendant downlighter with an injection-moulded reflector, the G3 Evo Pendant is available in black or white.

Part of the new G3 Evo family of downlighters, the G3 Evo Pendant is a striking choice for a range of applications. The pendant luminaire is rated IP40 as standard, with more robust, impact-resistant IP66 versions also available.

The G3 Evo Pendant offers superb energy efficiency and functionality. Like the rest of the G3 Evo range, it is engineered to support the principles of the circular economy and combines high performance, sustainability and exceptional versatility. G3 Evo Pendant is manufactured from an impressive 69% recycled materials.

Applications: staircase, entrance spaces, offices, corridors, reception areas, toilets, retail, and external canopies.

- High-efficiency suspended downlighters with optional integral SmartScan sensor
- IP66/IK10 variants suitable for external use
- Choice of black or white reflector colour
- Suspended with easily adjustable wire suspensions (3 m maximum suspension distance). Power cable not included.
- Die-cast, powder-coated aluminium body
- CRI 90 LEDs with enhanced R9 value available to special order
- SmartScan wireless technology removes the need for control cabling. Ideal for retro-fit

Up to IP66 **IK10** **Up to 152.5 LL/CW** SMARTSCAN LUXGUARD

Specification

Mounting	**Suspended**	IP rating	**Up to IP66**
Impact rating	**IK10**	Max presence detection height	**8 m**

Lighting

Distribution	**Area**	Lumen output	**1,145 lm - 4,075 lm**
Efficacy	**Up to 152.5 LL/CW**		

G3 Evo Pendant

Emergency data

Emergency lumen output	**340 lm - 435 lm**	Emergency type	**Maintained**
Emergency duration	**3 hours**	Battery specification	**Lithium Iron Phosphate (LiFePO4)**

Power

LED power	**8 W - 25 W**	Circuit power	**10 W - 28 W**

Construction

Housing	**High pressure die-cast aluminium body**	Finish	**Full polyester powder coat**
Body colour	**Black (RAL 9017)** **White (RAL 9016)**	Reflector colour	**Black reflector** **White reflector**

LED characteristics


CRI	**80+**	Colour temperature	**3000 K** **4000 K**
Rated life (hours)	**100 K - L90/B10**	LED protection	**LUX Guard**
Driver efficiency	**>88%**	Replaceable light source	**No**
Power factor	**>0.95**	MacAdam ellipse	**3 Step**
Flicker metric	**IEC TR 61547-1: PstLM ≤1.0 / SVM ≤0.4**		

Compliance

UKCA	**Yes**	CE	**Yes**
Energy efficiency class	**This product contains a light source of energy efficiency class A**		

G3 Evo Pendant

Dimensions

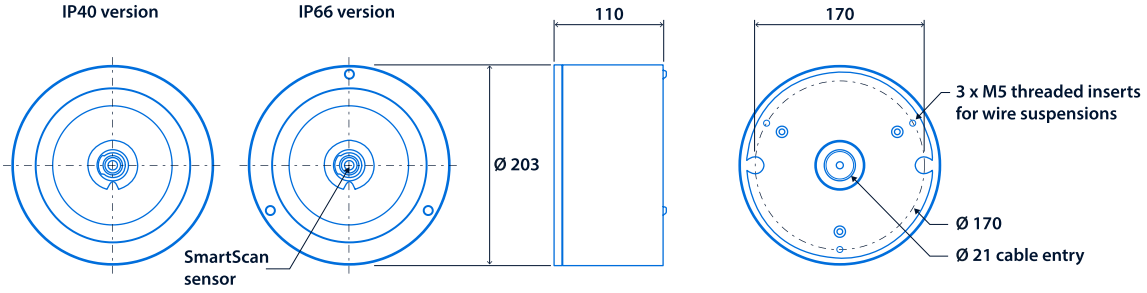

G3 Evo Pendant

Range

Emergency system (optional)	Product version	LED power	Reflector	Mounting	Lighting control system
W SmartScan Emergency*	**GT** IP40	**08** 8 W	**W** White	**P** Pendant	**S** SmartScan Internal
D DALI / Self-Test Emergency**	**GTX** IP66/IK10	**12** 12 W	**B** Black		**A** Dimming (DALI)
E Standard Emergency**		**18** 18 W			**L** Non-dimming
		25 25 W ***			

* **Only** available with **S** control type ** **Only** available with **A / L** control type *** **Not** available with **W / D / E** emergency systems

3000 K versions - suffix catalogue number with **C830**

E.g. **WGTX08WPS** = SmartScan Emergency / IP66/IK10 / 8 W / White reflector / Pendant / SmartScan Internal




White IP40 version



Black IP66 version




White IP40 version with SmartScan



Black IP66 version with SmartScan





Click or scan here

View G3 Evo Pendant variants using our online filtering tool



Information is correct as of 10-Nov-2026, however must not be interpreted as a guarantee of individual product performance and/or characteristics. We reserve the right to alter specifications and designs without prior notice.