Kanby LED Controller

LED controller luminaires



Kanby LED Controller is a long-life, surface-mounted linear LED luminaire, ideal for lighting school classrooms, corridors, healthcare buildings and retail and storage areas.

The steel-bodied Thorlux Kanby LED Controller is an ideal replacement for obsolete T5 fluorescent solutions, offering significantly increased luminaire efficacy and lower power consumption.

Part of the tried-and-tested Kanby range from Thorlux Lighting.

Applications: retail sales floor, storage areas, classrooms, toilets, corridors, healthcare buildings, and data centres.

- Ultra slim profile
- SmartScan wireless technology removes the need for control cabling. Ideal for retro-fit

IP40 | Up to 142.2 LL/CW | SMARTSCAN | LUXGUARD

Specification

Mounting	**Surface**	IP rating	**IP40**
Max presence detection height	**8 m**		

Lighting

Optic	**Opal diffuser**	Lumen output	**3,555 lm - 9,465 lm**
Efficacy	**Up to 142.2 LL/CW**		

Emergency data

Emergency lumen output	**457 lm - 565 lm**	Emergency type	**Maintained**
Emergency duration	**3 hours**	Battery specification	**Lithium Iron Phosphate (LiFePO4)**

Power

LED power	**21 W - 63 W**	Circuit power	**25 W - 71 W**

Kanby LED Controller

Construction

Housing	**Steel body, gear cover and end caps**	Finish	**Full polyester powder coat**
Body colour	**White**	Optical assembly	**Polycarbonate diffuser**

LED characteristics


CRI	**80+**	Colour temperature	**4000 K**
Rated life (hours)	**100 K - L90/B10**	LED protection	**LUX Guard**
Driver efficiency	**>85%**	Replaceable light source	**Yes**
Power factor	**>0.9**	MacAdam ellipse	**3 Step**
Flicker metric	**IEC TR 61547-1: PstLM ≤1.0 / SVM ≤0.4**		

Compliance


UKCA	**Yes**	CE	**Yes**
Energy efficiency class	**This product contains a light source of energy efficiency class B**		

Dimensions

Narrow Body

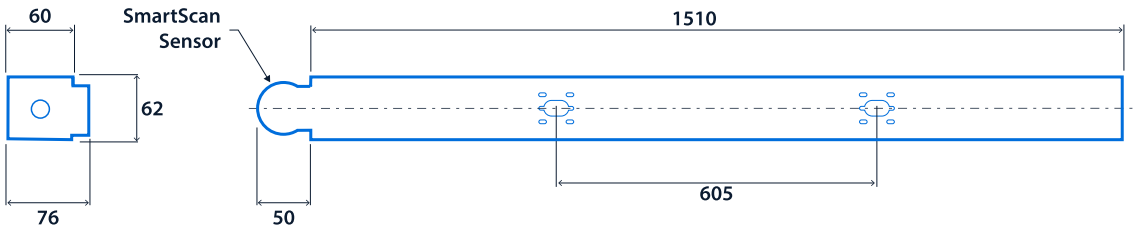

Wide Body

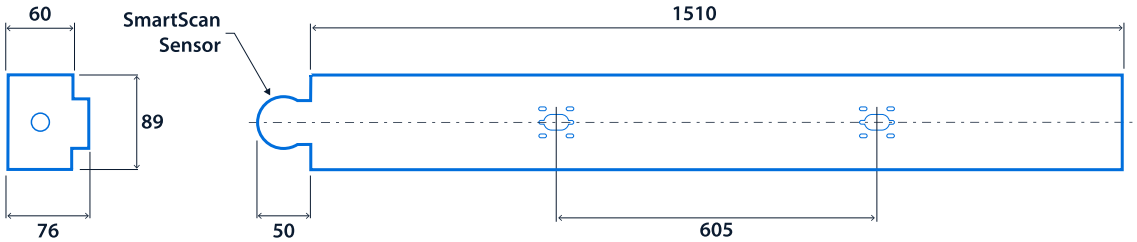

Kanby LED Controller

Range

	Nominal size	LED power	Emergency system (optional)	Narrow body	Wide body	Lighting control system
SmartScan	1500 mm	21 W	**W**	**KB17606**		**SS**
		28 W	**W**	**KB16107**		**SS**
		37 W	**W**	**KB16108**		**SS**
		49 W	**W**		**KB16103**	**SS**
		63 W	**W**		**KB16104**	**SS**
Standard	1500 mm	21 W	**T / E**	**KB17607**		**A / L**
		28 W	**T / E**	**KB16105**		**A / L**
		37 W	**T / E**	**KB16106**		**A / L**
		49 W	**T / E**		**KB16101**	**A / L**
		63 W	**T / E**		**KB16102**	**A / L**

Emergency system - prefix catalogue number with **W** SmartScan Emergency / **T** AutoTest Emergency / **E** Standard Emergency
Lighting control system - suffix catalogue number with **SS** SmartScan Internal / **A** Dimming (DALI) / **L** Non-dimming

E.g. **WKB17606SS** = 1500 mm / 21 W / SmartScan Emergency / Narrow body / SmartScan Internal

Kanby LED Controller




Narrow body



Wide body





Click or scan here

View Kanby LED Controller variants using our online filtering tool



Information is correct as of 05 Nov 2026, however must not be interpreted as a guarantee of individual product performance and/or characteristics. We reserve the right to alter specifications and designs without prior notice.