Mina-M

Adjustable recessed accent spotlights

Mina-M is a recessed-mounted display luminaire.

Mina-M offers 355° azimuth adjustment and a 60° vertical adjustment. 10 W or 15 W - 38° beam versions are available in 3000 K and 4000 K. Part of the Mina family of downlighters.

Applications: display, retail, reception areas, halls of residence, hotels, restaurants, and public buildings.

- 38° beam angle
- 355° azimuth adjustment
- 60° vertical adjustment
- Supplied with remote gear unit
- Luminaires can be supplied pre-wired with a purpose made 1 m connection lead for plugging directly into the SmartScan Hub
- Fitted with CRI 90 LEDs. Suitable for retail applications

Notes: Black and silver finishes and CRI 80 version available to special order (minimum order quantity applies)



IP20 **Up to 122.1 LL/CW**

Specification

Mounting	**Recessed**	IP rating	**IP20**

Lighting

Distribution	**38° beam**	Lumen output	**1,440 lm - 2,135 lm**
Efficacy	**Up to 122.1 LL/CW**		

Power

LED power	**10 W - 15 W**	Circuit power	**12 W - 18 W**

Construction

Housing	**Die-cast aluminium ring assembly**	Body colour	**Satin white (RAL9016)**
Optical assembly	**High performance aluminium reflector with injection moulded anti-glare bezel**		


LED characteristics

CRI	**90+**	Colour temperature	**3000 K** **4000 K**
Rated life (hours)	**67 K - L80/B10**	LED protection	**-**
Driver efficiency	**>83%**	Power factor	**>0.95**
MacAdam ellipse	**3 Step**	Flicker metric	**IEC TR 61547-1: PstLM ≤1.0 / SVM ≤0.4**

Compliance


UKCA	**Yes**	CE	**Yes**
Energy efficiency class	**This product contains a light source of energy efficiency class E**		

Dimensions

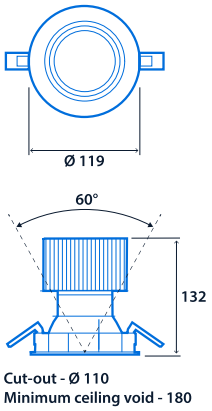


Cut-out - Ø 110
Minimum ceiling void - 180

DALI Remote Driver

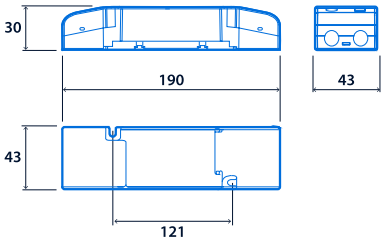

Non-Dimming Remote Driver

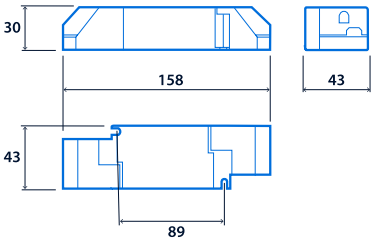

Range

Colour temperature	LED power	CAT. No.	Lighting control system
3000 K	10 W	**MA20834**	**A / L**
	15 W	**MA20835**	**A / L**
4000 K	10 W	**MA20836**	**A / L**
	15 W	**MA20837**	**A / L**

Lighting control system - suffix catalogue number with **A** Dimming (DALI) / **L** Non-dimming
Hub version - suffix catalogue number with **SHL** (**Only** available with **L** control type)

E.g. **MA20834LSHL** = 3000 K / 10 W / Non-dimming / Hub version



Click or scan here

View Mina-M variants using our online filtering tool



Information is correct as of 10 Nov 2026, however must not be interpreted as a guarantee of individual product performance and/or characteristics. We reserve the right to alter specifications and designs without prior notice.