# Mina-S

## Adjustable recessed accent downlights

The Mina-S is a discreet recessed-mounted display luminaire.

Mina-S provides 355° azimuth adjustment and a 60° range of vertical adjustment, and is available in either 5 W or 8 W versions. It is part of the Mina family of downlighters.

Applications: reception areas, retail, display, halls of residence, hotels, restaurants, and museums.

- Spot 21° and Flood 45° beam angle versions
- 355° azimuth adjustment
- 60° vertical adjustment
- Supplied with remote gear unit fitted with 2 m lead
- Luminaires can be supplied pre-wired with a purpose made 1 m connection lead for plugging directly into the Smart Hub
- Fitted with CRI 90 LEDs with enhanced R9 value. Suitable for retail applications

Notes: Black and silver finishes and CRI 80 version available to special order (minimum order quantity applies)



**IP20** **Up to 87.5 LL/CW**

## Specification

| | | | |
|---|---|---|---|
| Mounting | **Recessed** | IP rating | **IP20** |

## Lighting

| | | | |
|---|---|---|---|
| Distribution | **21° beam**<br>**45° beam** | Lumen output | **455 lm - 775 lm** |
| Efficacy | **Up to 87.5 LL/CW** | | |

## Power

| | | | |
|---|---|---|---|
| LED power | **5 W - 8 W** | Circuit power | **6 W - 9 W** |

# Mina-S

## Construction

| | | | |
|---|---|---|---|
| Housing | **Die-cast aluminium ring assembly** | Body colour | **Satin white** |
| Optical assembly | **High performance aluminium reflector with injection moulded anti-glare bezel** | | |

## LED characteristics


| | | | |
|---|---|---|---|
| CRI | **90+** | Colour temperature | **3000 K**<br>**4000 K** |
| Rated life (hours) | **60 K - L70/B10** | LED protection | **-** |
| Driver efficiency | **>80%** | Power factor | **>0.9** |
| MacAdam ellipse | **3 Step** | Flicker metric | **IEC TR 61547-1: PstLM ≤1.0 / SVM ≤0.4** |

## Compliance


| | | | |
|---|---|---|---|
| UKCA | **Yes** | CE | **Yes** |
| Energy efficiency class | **This product contains a light source of energy efficiency class E** | | |

# Dimensions


**Round Version**

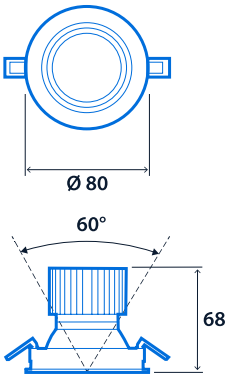


**Square Version**

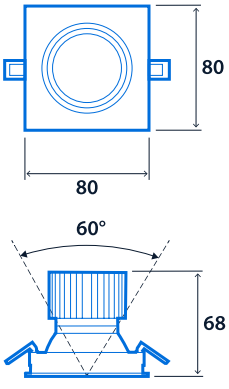


**Standard Remote Driver**

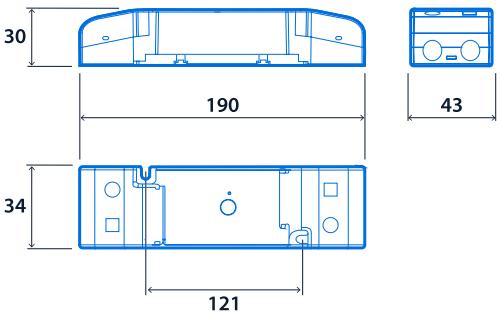


**Cut-out - Ø 75**
**Minimum ceiling void - 120**

## Range

| | Colour temperature | LED power | 21° beam | 45° beam | Lighting control system |
|---|---|---|---|---|---|
| Round | 3000 K | 5 W | **MA17930** | **MA17934** | **A / L** |
| | | 8 W | **MA17931** | **MA17935** | **A / L** |
| | 4000 K | 5 W | **MA17932** | **MA17936** | **A / L** |
| | | 8 W | **MA17933** | **MA17937** | **A / L** |
| Square | 3000 K | 5 W | **MA17938** | **MA17942** | **A / L** |
| | | 8 W | **MA17939** | **MA17943** | **A / L** |
| | 4000 K | 5 W | **MA17940** | **MA17944** | **A / L** |
| | | 8 W | **MA17941** | **MA17945** | **A / L** |

**Lighting control system** - suffix catalogue number with **A** Dimming (DALI) / **L** Non-dimming
**Hub version** - suffix catalogue number with **SHL** (**Only** available with **L** control type)

E.g. **MA17930LSHL** = Round / 3000 K / 5 W / 21° beam / Non-dimming / Hub version





## Click or scan here

**View Mina-S variants using our online filtering tool**



Information is correct as of 10 Nov 2026, however must not be interpreted as a guarantee of individual product performance and/or characteristics. We reserve the right to alter specifications and designs without prior notice.