SmartScan Gateway

Master control and web interface with SmartScan wireless communication

The SmartScan Gateway transmits energy performance and status reports for both standard and emergency luminaires to the SmartScan web server. It can connect to a maximum of 250 SmartScan devices.

- Polycarbonate body finished white (RAL9016)
- Central monitoring for up to 250 SmartScan and SmartScan emergency luminaires. Extra Gateways can be fitted to accommodate more luminaires
- Central time control for SmartScan External luminaires
- Communicates with the SmartScan website using MQTTS mobile telecommunications
- Enables scheduled emergency test times / dates managed using the SmartScan website
- Status Indicators show operational condition
- Software security updates will be provided for a minimum of 10 years
- Ethernet connection for alternate connectivity to SmartScan website



IP65

SMARTSCAN


Specification

IP rating	**IP65**

Compliance

UKCA	**Yes**	CE	**Yes**

Dimensions

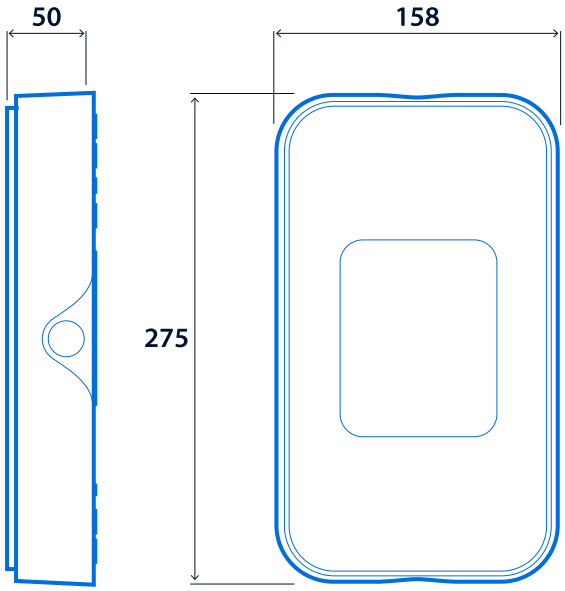

SmartScan Gateway

Range

Description	CAT. No.
SmartScan Gateway	**SS21240**
SmartScan Gateway MPS	**SS21241**





Click or scan here

View SmartScan Gateway variants using our online filtering tool



Information is correct as of 10-Nov-2026, however must not be interpreted as a guarantee of individual product performance and/or characteristics. We reserve the right to alter specifications and designs without prior notice.