SmartScan Interface

Voltage-free Interface to allow selected group or global commands to be transmitted to SmartScan luminaires



The compact SmartScan Interface unit allows control of SmartScan installations using volt-free inputs.

The Interface can be used to control individual switching groups or multiple groups on a SmartScan mesh network, and programmed via a SmartScan handheld programmer unit.

- Allows control of SmartScan installations using volt-free inputs e.g. switching all SmartScan lighting to permanent ON, overriding automatic control if the fire alarm switches into alarm state
- Can be used to control individual switching groups or multiple groups on a SmartScan mesh network
- LED indicator shows the current configuration of the lighting (if a latching input is used)
- Can initiate testing of emergency luminaires
- Can be operated with latching or momentary close inputs
- 24 inputs providing 10 group commands, 3 ColourActive group commands and 11 global commands
- Programmable using the SmartScan Programmer

IP56 SMARTSCAN


Specification

IP rating	**IP56**

Compliance

UKCA	**Yes**	CE	**Yes**

Dimensions

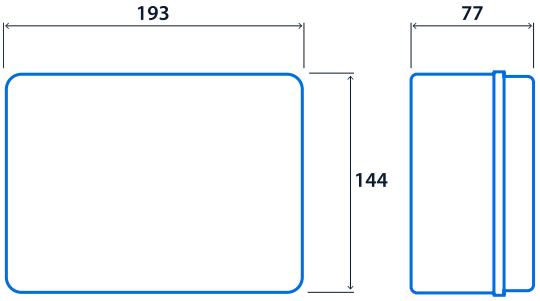

SmartScan Interface

Range

Description	CAT. No.
SmartScan Interface	**SS20305**



Click or scan here

View SmartScan Interface variants using our online filtering tool



Information is correct as of 10-Nov-2026, however must not be interpreted as a guarantee of individual product performance and/or characteristics. We reserve the right to alter specifications and designs without prior notice.