Strike M Surface

Surface-mounted adjustable spotlights



Strike M Surface is a surface-mounted spotlight that is perfectly suited for display and retail applications.

Strike M Surface is part of the versatile Strike range of modern, sleek spotlights with different mounting options to provide the widest options for the lighting designer. The adaptable design of the Strike M Surface features interchangeable low-glare optics, which are available in either narrow (22°), wide (33°), or flood (54°) beams, and provide a smooth distribution and reduced spill light.

Strike M Surface boasts the same great features as the Strike S Surface, including CRI90 LEDs for outstanding colour rendering, 3000 K and 4000 K options as standard, and the ability to be rotated 350° azimuth and 90° vertically for a full range of movement.

Applications: display and feature, retail, reception areas, hospitality, art galleries, museums, and libraries.

- Die-cast aluminium luminaire head and spun steel gear body
- TM66 score of 2.5 - LIA/CIBSE certification scheme TSD-012 verified
- 350° azimuth and 90° vertical adjustment
- Low glare optical control
- Optimised beam distribution using lens technology for reduced spill light
- Fitted with CRI 90 LEDs, suitable for retail applications

IP20 **Up to 123.1 LL/CW** **TM66 circularity score 2.5**

Specification

Mounting	**Surface**	IP rating	**IP20**

Sustainability

TM66 circularity score	**2.5**

Lighting

Distribution	**22° beam - Narrow** **33° beam - Wide** **54° beam - Flood**	Lumen output	**1,900 lm - 3,200 lm**
Efficacy	**Up to 123.1 LL/CW**		

Strike M Surface

Power

LED power	**15 W - 22 W**	Circuit power	**18 W - 26 W**

Construction

Housing	**Die-cast aluminium luminaire head and spun steel gear body**	Finish	**Full polyester powder coat**
Body colour	**Black (RAL 9005)** **White (RAL 9016)**	Optical assembly	**One-piece interchangeable acrylic lens and reflector optic**

LED characteristics


CRI	**90+**	Colour temperature	**3000 K** **4000 K**
Rated life (hours)	**67 K - L80/B10**	Driver efficiency	**>85%**
Replaceable light source	**Yes**	Power factor	**>0.95**
MacAdam ellipse	**3 Step**	Flicker metric	**IEC TR 61547-1: PstLM ≤1.0 / SVM ≤0.4**

Compliance

UKCA	**Yes**	CE	**Yes**
Energy efficiency class	**This product contains a light source of energy efficiency class C** **This product contains a light source of energy efficiency class D**		

Strike M Surface

Dimensions

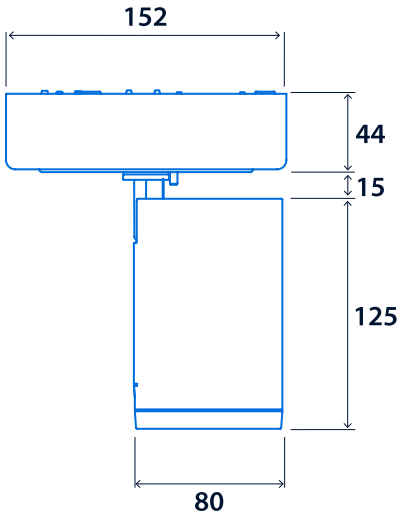

Strike M Surface

Range

Product	Size	LED power	Mounting	Distribution	Colour temperature	Body colour	Lighting control system
SK Strike	**M** 80 mm dia.	**15** 15 W **19** 19 W **22** 22 W	**S** Surface	**N** 22° - Narrow **W** 33° - Wide **F** 54° - Flood	**3** 3000 K **4** 4000 K	**W** White **B** Black	**A** Dimming (DALI) **L** Non-dimming

E.g. **SKM15SN3WA** = 80 mm dia. / 15 W / Surface mounted / Narrow - 22° / 3000 K / White body / Dimming (DALI)

Accessories

Product code	Description	Weight
SKM20890	Front trim - White	0.09 kg
SKM20891	Front trim - Black	0.09 kg
SKM20892	22° Narrow Optic	0.08 kg
SKM20894	33° Wide Optic	0.08 kg
SKM20895	54° Flood Optic	0.08 kg







Flood optic - 54° beam



Wide optic - 33° beam



Narrow optic - 22° beam

Click or scan here

View Strike M Surface variants using our online filtering tool



Information is correct as of 04 Nov 2026, however must not be interpreted as a guarantee of individual product performance and/or characteristics. We reserve the right to alter specifications and designs without prior notice.