Tego

Circular recessed downlighters

Tego is a small, recessed luminaire with an injection-moulded reflector, finished in white.

Open IP20 and frosted IP65 versions are available in 14 W and 20 W. Tego is designed for rapid installation and is supplied with a remote gear unit fitted with a two-metre lead. CRI 90 LEDs with enhanced R9 value levels provide vivid, crisp, and enriched colour quality, making Tego an ideal choice for attractive display lighting in a range of environments.

Applications: reception areas, retail, public areas, and toilets.

- Sprung suspension arms for rapid installation
- Supplied with remote gear unit fitted with 2 m lead
- Luminaires can be supplied pre-wired with a purpose made 1 m connection lead for plugging directly into the Smart Hub
- Fitted with CRI 90 LEDs with enhanced R9 value. Suitable for retail applications

Notes: CRI 80 version available to special order (minimum order quantity applies)



Up to IP65 (IP20 above ceiling) **Up to 91.7 LL/CW**

Specification

Mounting	**Recessed**	IP rating	**Up to IP65 (IP20 above ceiling)**

Lighting

Distribution	**38° beam**	Lumen output	**1,270 lm - 2,110 lm**
Efficacy	**Up to 91.7 LL/CW**		

Power

LED power	**14 W - 20 W**	Circuit power	**17 W - 23 W**

Construction

Housing	**High pressure die-cast aluminium bezel**	Finish	**Full polyester powder coat**
Body colour	**Satin white**	Optical assembly	**High performance aluminium reflector with injection moulded anti-glare bezel**

LED characteristics


CRI	**90+**	Colour temperature	**3000 K** **4000 K**
Rated life (hours)	**50 K - L70/B10**	LED protection	**-**
Driver efficiency	**>80%**	Power factor	**>0.9**
MacAdam ellipse	**3 Step**	Flicker metric	**IEC TR 61547-1: PstLM ≤1.0 / SVM ≤0.4**

Compliance

UKCA	**Yes**	CE	**Yes**
Energy efficiency class	**This product contains a light source of energy efficiency class E**		


Dimensions

IP20 Version




Cut-out - Ø 110
Minimum ceiling void - 140

IP65 Version



Cut-out - Ø 110
Minimum ceiling void - 140

Standard Remote Driver

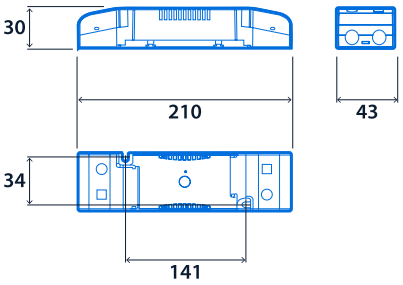

Range

LED power	Colour temperature	IP20	IP65	Lighting control system
14 W	3000 K	**TEG18036**	**TEG18044**	**A / L**
20 W	3000 K	**TEG18037**	**TEG18045**	**A / L**
14 W	4000 K	**TEG18038**	**TEG18046**	**A / L**
20 W	4000 K	**TEG18039**	**TEG18047**	**A / L**

Lighting control system - suffix catalogue number with **A** Dimming (DALI) / **L** Non-dimming
Hub version - suffix catalogue number with **SHL** (**Only** available with **L** control type)

E.g. **TEG18036LSHL** = 14 W / 3000 K / IP20 / Non-dimming / Hub version





Click or scan here

View Tego variants using our online filtering tool



Information is correct as of 04-Nov-2026, however must not be interpreted as a guarantee of individual product performance and/or characteristics. We reserve the right to alter specifications and designs without prior notice.