Tora


Low-profile linear LED strip

Tora is Thorlux Lighting's flexible, self-adhesive LED strip.

Tora is supplied as a kit with anodised aluminium extrusion, opal polycarbonate diffuser, mounting clips, and driver. The strip has a maximum length of 4.8 metres and can be cut to length to suit the application. Additionally, the components can be selected separately to create bespoke solutions.

Applications: accent lighting, galleries, pelmet lighting, and reception areas.

- Kit contains self-adhesive flexible LED strip, anodised aluminium extrusion, opal polycarbonate diffuser and driver to make up to 4.8 m length
- Components can be selected separately to create bespoke solutions
- LEDs “binned” to 3-step MacAdam ellipse providing excellent colour uniformity

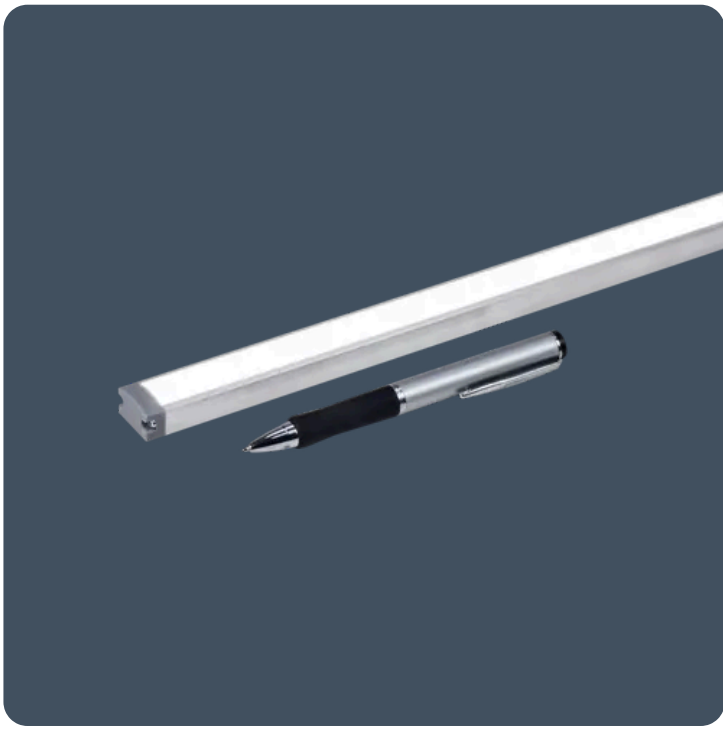

IP40 **Up to 62.3 LL/CW**

Specification

Mounting	**Surface**	IP rating	**IP40**
Nominal size	**4.8 m**		

Lighting

Optic	**Opal diffuser**	Efficacy	**Up to 62.3 LL/CW**

Power

LED power per metre	**6.6 W - 14.9 W**	Circuit power per metre	**7.5 W - 16.6 W**

Construction

Housing	**Anodised aluminium extrusion**	Body colour	**Silver**
Optical assembly	**Polycarbonate diffuser**		

Tora

LED characteristics

CRI	**80+**	Colour temperature	**3000 K** **4000 K**
Rated life (hours)	**50 K - L70/B10**	LED protection	**-**
Driver efficiency	**>80%**	Power factor	**>0.9**
MacAdam ellipse	**3 Step**	Flicker metric	**IEC TR 61547-1: PstLM ≤1.0 / SVM ≤0.4**

Compliance

UKCA	**Yes**	CE	**Yes**
Energy efficiency class	**This product contains a light source of energy efficiency class E**		


Dimensions



Remote gear unit - non-dimming version



Remote gear unit - DALI version

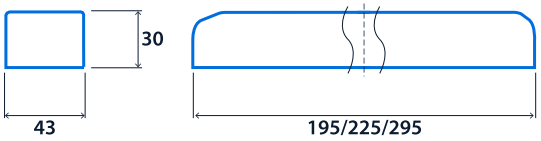

Range

Kit	LED power per metre	3000 K	LED power per metre	4000 K	Lighting control system
1000 lm	7.1 W/m	**TOR19760**	6.6 W/m	**TOR19762**	**A / L**
2000 lm	14.9 W/m	**TOR19761**	13.8 W/m	**TOR19763**	**A / L**


Kit contains - 5.0 m flexible LED strip (can be cut at 100mm intervals) / 2 x 2.4 m anodised aluminium extrusion / 2 x 2.4 m opal polycarbonate diffuser / 1 x driver / 2 x starter connector / 2 x end cap (live end) / 2 x end cap (dead end) / 6 x mounting clips

Lighting control system - suffix catalogue number with **A** Dimming (DALI) / **L** Non-dimming

E.g. **TOR19760L** = 1000 lm / 7.1 W/m / 3000 K / Non-dimming

Additional Components

Product code	Description	Weight
TOR19764	5 m flexible LED strip - 3000 K / 1000 lm / 7.1 W/m	0.10 kg
TOR19766	5 m flexible LED strip - 4000 K / 1000 lm / 6.6 W/m	0.10 kg
TOR19765	5 m flexible LED strip - 3000 K / 2000 lm / 14.9 W/m	0.10 kg
TOR19767	5 m flexible LED strip - 4000 K / 2000 lm / 14.9 W/m	0.10 kg
TOR18862	2.4 m anodised aluminium extrusion	0.4 kg
TOR18863	2.4 m opal polycarbonate diffuser	0.1 kg
TOR18864	End cap (live end) x1	0.1 kg
TOR18865	End cap (dead end) x1	0.1 kg
TOR18866	Mounting clip x1	0.1 kg
TOR19768	300 mm starter lead	0.00 kg
TOR19769	60 mm corner connection lead	0.00 kg
TOR19770	150 mm corner connection lead	0.00 kg
TOR18870	60 W non-dimming - For use with 6.6/7.1 W/m	0.38 kg
TOR18871	100 W non-dimming driver - For use with 13.8/14.9 W/m	0.34 kg
TOR18873	60 W DALI - For use with 6.6/7.1 W/m	0.18 kg
TOR18874	100 W DALI driver - For use with 10/18.8 W/m	0.25 kg



Click or scan here

View Tora variants using our online filtering tool



Information is correct as of 10 Nov 2026, however must not be interpreted as a guarantee of individual product performance and/or characteristics. We reserve the right to alter specifications and designs without prior notice.